

Checks **SGT705**

Construction Multi Level Loop Tile Size 500 x 500mm

Yarn Type FITTON Premium Nylon

Stain/ Soil Resistant Resistec

Dye Method 100% Solution Dyed

580gm/m² (17oz/yd²) [±5%] **Tufted Face Weight**

1/12 Gauge 10 Stitches per inch Tufts 120

Finished Pile Height 4.57mm (0.18") [±5%] **Finished Pile Thickness** 3.05mm (0.12") [±5%]

5100oz/yd3 **Average Density**

Sus-Pac Thermoplastic **Secondary Backing Total Thickness** 7mm (0.276") [±5%]

Total Weight 2,980gm/m² (87.64oz/yd²) [±5%]

Performance Specifications

ASTM D1335 > 8lbs Tuft Bind

ASTM D5252 > 3.0 at 12,000 cycles **Hexapod Test**

Flammability (Radiant Panel Test) ASTM E648 ≥ 0.45 (Class I)

Smoke Density ASTM E662 ≤ 450 **ASTM D6540** Soiling AATCC 175 Stain Resistance

Dimensional Stability ASTM D7570 < 0.2%

ASTM D2859 (Self-Extinguishing) **Methenamine Pill Test** Colorfastness to Light (AATCC 16E) ≥ 4.0 at 80 Hours Colorfastness to Crocking (AATCC 165) ≥ 4.0 Wet or Dry **Electrostatic Propensity** (AATCC 134) 20% R.H.,70° F. ≤ 3.5 KV (TARR) Commercial End-Use Applications **Texture Appearance Retention Rating**

Recommended Installation Method

Monolithic

Indoor Air Quality

Ashlar







CRI Green Label Plus™

Brick

^ > ^ >

Quarter Turned




















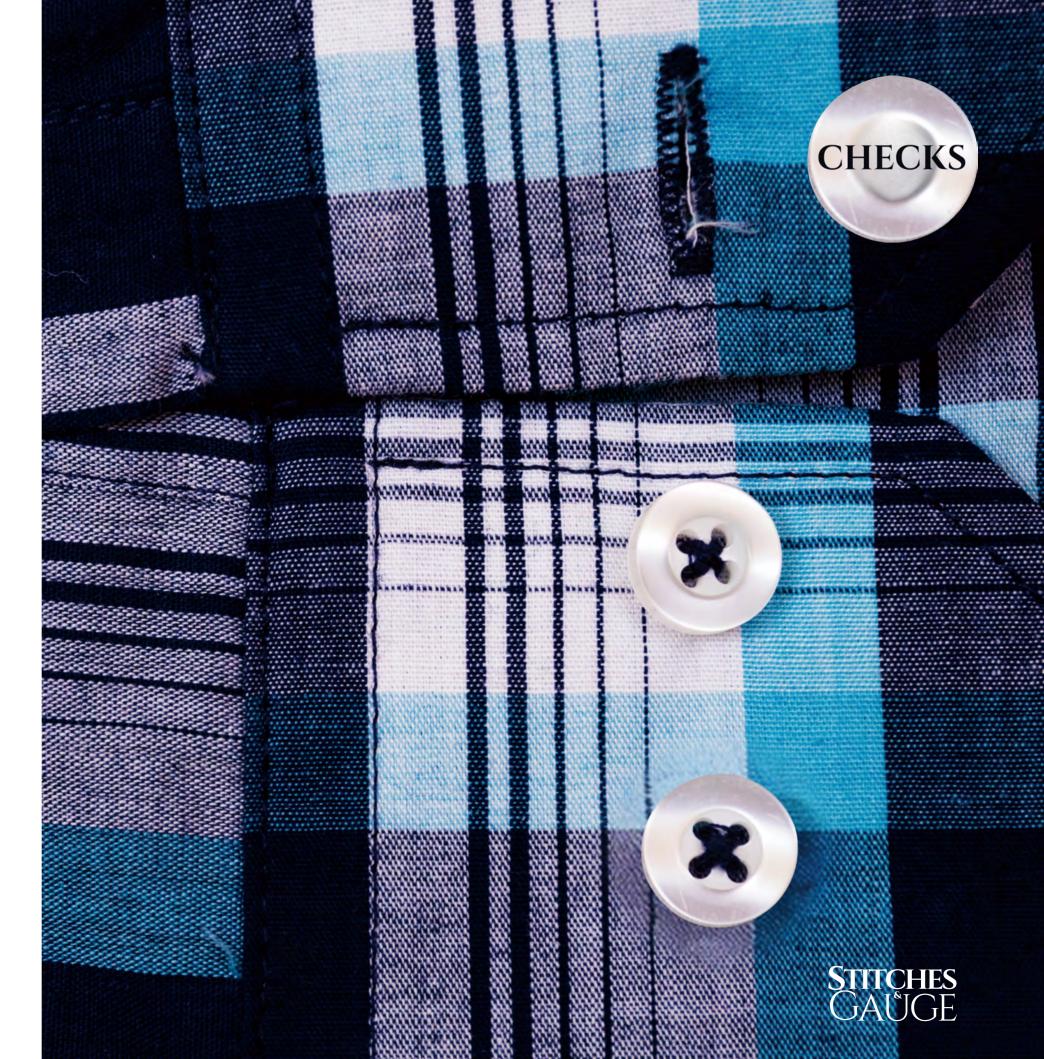



Checks SGT705





















1703-71802









