



Nordic

ShawContract®

At 5mm thick, *Nordic* can be used seamlessly with most carpet tiles without the need of a transition strip. The loose lay optional backing allows for installation over raised access flooring along with a variety of installation methods including glue down, perimeter glue and loose lay. Constructed in 18 cm x 122 cm | 7 in x 48 in plank, *Nordic* allows for maximum installation options including stagger, herringbone, ashlar and brick to fit the need of a variety of spaces. Combine planks to build scale with impactful colour blocking or use one colour to ground a space.

COVER PAGE
NORDIC (LVT 4377V) IN RADIANT (77710)
INSTALLED STAGGER

RIGHT
NORDIC (LVT 4377V) IN GOLDEN (77756) | INSTALLED STAGGER
BISECT (CARPET TILE 5T448) IN AGGREGATE (06501) AND
JACQUARD (CARPET TILE 5T280) IN INDIGO (79596 | INSTALLED STAGGER





Nordic features our maintenance friendly **ExoGuard®** finish with more resistance to abrasion, staining, and improved cleanability. Manufactured without ortho-phthalates, *Nordic* is **Floorscore®** certified for low VOCs.

NORDIC (LVT 4377V)
IN DRIFTWOOD (77120) + BIRCH (77140) + RADIANT (77710)
INSTALLED STAGGER + HERRINGBONE

Nordic can be used seamlessly with carpet tile without the need of a transition strip. With superior scratch resistance and acoustical benefits, they're ideal for the spaces where we work, learn, heal and live.



NORDIC (LVT 4377V) IN ALDER (77104)
INSTALLED STAGGER + HERRINGBONE

Colour and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. V1 products have little or no variation in shade and / or texture, while V4 have the greatest variation from piece to piece. Images represent shade variations only. Samples should be used to assess colour.



V2 Aspen 77100



V3 Alder 77104



V2 Blonde 77112



V2 Calm 77111



V2 Honey 77103



V2 Natural 77101



V3 Driftwood 77120



V2 Birch 77140



V2 Fir 77155



V2 Radiant 77710



V2 Redwood 77720



V2 Elm 77721



V2 Balance 77755



V3 Golden 77756



Nordic


Specifications

Style Name	Nordic 20 mil 5 mm
Style Number	4377V
Construction	Heavy Commercial Luxury Vinyl Tile With Fiberglass
Finish	ExoGuard®
Edge Profile	Micro-Bevel
Installation Type	Loose Lay
Installation	Direct Glue, Floating or Perimeter Glue
Recommended Adhesive	LokWorx+ Resilient, LokWorx Resilient, Shaw 4151 or S150 - 95 Spray

	Metric Units	US Units
Nominal Dimensions	18 cm × 122 cm	7 in × 48 in
Wear Layer Thickness	20 mil (0.51 mm)	0.02 in
Overall Thickness	5.0 mm	0.197 in
Actual Width	18.42 cm	7.25 in
Actual Length	121.92 cm	48.00 in
Warranty*	15 Year Commercial Limited	

*For detailed warranty information visit shawcontract.com.

Recommended Installation Methods

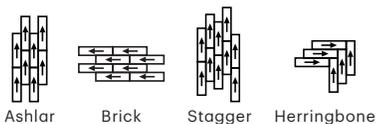

This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on shawcontract.com. Specifications are subject to nominal manufacturing variances. Material supply and / or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.

ShawContract®