

manual book




# Serene


## Specifications

Style Name	Serene	
Style Number	4530V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Finish	ExoGuard+®	
Installation Type	Direct Glue Or Perimeter Glue	
Recommended Adhesive	LokWorx+ Resilient, LokWorx Resilient, Shaw 4151 or S150 - 95 Spray Shaw 4100, 4151, S150	
Nominal Dimensions	US Units	Metric Units
Pieces Per Carton	7 in × 48 in	18 cm × 122 cm
Area Per Carton	8 pcs	
Wear Layer Thickness	19.83 sq ft	1.8 sq m
Overall Thickness	0.022 in	22 mil (0.56 mm)
Warranty*	0.197 in	5.0 mm
	15 Year Commercial Limited	

### Recommended Installation Methods

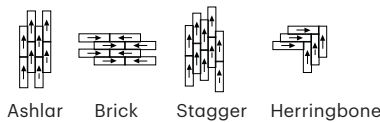

### Color and Visual Variation Index

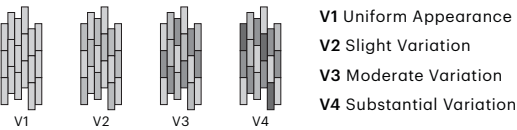

\*For detailed warranty information visit [shawcontract.com](http://shawcontract.com).

# Serene







**Serene** 5.0, at 5mm thick, is suitable for heavy traffic, rolling and static loads. Constructed in 18 cm x 122 cm | 7 in x 48 in planks, **Serene** offers versatile installation options such as stagger, herringbone, ashlar, and brick patterns. You can combine planks for impactful colour blocking or use a single colour to ground a space.





Equipped with our maintenance friendly ExoGuard+® finish, **Serene** offers more resistance to abrasion, staining and improved cleanability. **Serene** is Floorscore® certified for low VOCs and manufactured without ortho-phathlates.



Colourways

**Serene** enhances existing designs by modernising overall aesthetics and introducing authentic woods visuals with subtle, low-gloss finishes. The colourway offers a palette of core colours and visuals that provides visual consistency and design flexibility to meet a variety of specification needs.



SERENE 5.0 (4530V) IN PINECONE (56720) | INSTALLED STAGGER





SERENE 5.0 (4530V) IN FOREST (56703) | INSTALLED STAGGER

Serene 5.0 4530V

18 cm x 122 cm (7 in x 48 in)



V3 Alpine 56100



V2 Zion 56103



V3 Rise 56120



V2 Riverside 56140



V3 Prairie 56240



V3 Plains 56250



V3 Ridgeline 56504



V2 Range 56506



V3 Smoky 56516



V2 Forest 56703



V3 Pinecone 56720



V2 Ravine 56730




V3 Traverse 56760

SPECIFICATION

Style Name	Serene 5.0
Style Number	4530V
Construction	Heavy Commercial Luxury Vinyl Tile
Finish	ExoGuard+®
Installation Type	Direct Glue Or Perimeter Glue
Nominal Dimensions	7 in × 48 in (18 cm × 122 cm)
Pieces Per Carton	8 pcs
Area Per Carton	19.83 sq ft (1.8 sq m)
Weight Per Carton	37.88 lbs (17.18 kg)
Wear Layer Thickness	0.022 in (0.56 mm)
Overall Thickness	0.197 in (5.0 mm)
Warranty*	15 Year Commercial Limited

Installation

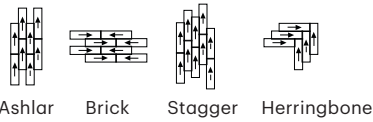

Ashlar Brick Stagger Herringbone



Colour and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. V1 products have little or no variation in shade and / or texture, while V4 have the greatest variation from piece to piece. Images represent shade variations only. Samples should be used to assess colour.

V1  
  
Uniform Appearance

V2  
  
Slight Variation

V3  
  
Moderate Variation

V4  
  
Substantial Variation

V3  
  
Alpine 56100

V2  
  
Zion 56103

V3  
  
Rise 56120

V2  
  
Riverside 56140

V3  
  
Prairie 56240

V3  
  
Plains 56250

V3  
  
Ridgeline 56504

V2  
  
Range 56506

V3  
  
Smoky 56516

V2  
  
Forest 56703


V3  
  
Pinecone 56720

V2  
  
Ravine 56730

V3  
  
Traverse 56760

Serene

Serene has a layered construction that is engineered for enhanced durability in high-demand environments. It features our maintenance-friendly **ExoGuard+®** finish with more resistance to abrasion, staining, and improved cleanability.

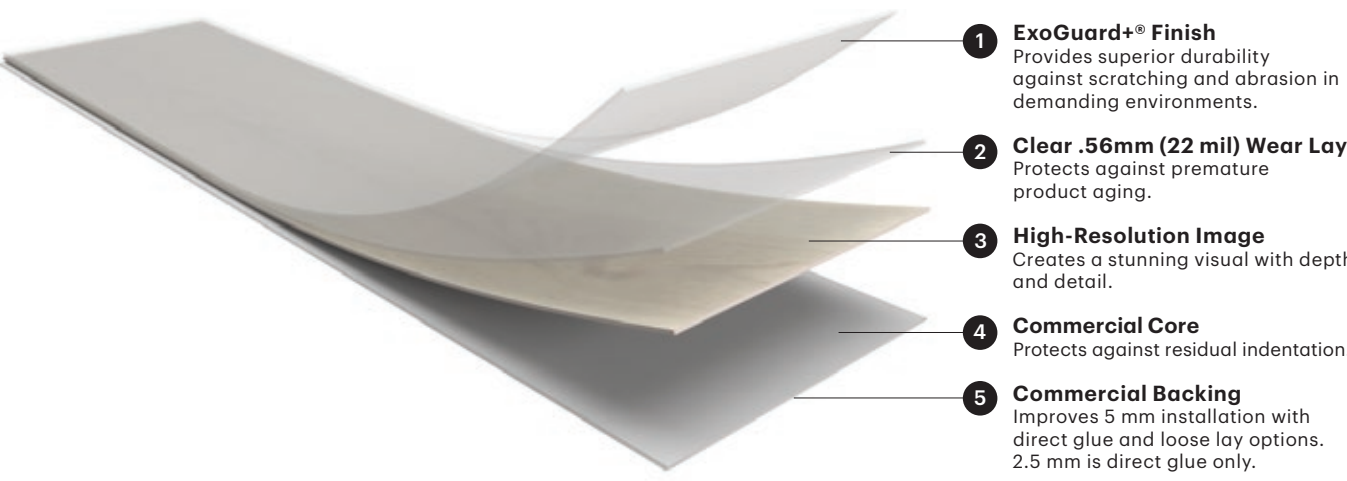

**Superior Durability**  
ExoGuard+® advanced topical finish technology delivers the highest performance scratch resistance and resists UV light degradation, hand sanitizers, disinfectants and common stains.

**Direct Glue or Loose Lay**  
The dual-purpose backing construction allows for direct glue or loose-lay installation for more flexibility to support the needs of the space.

**Polish-Optional Reduces Cost**  
ExoGuard+® is a polish-optional finish that can reduce the cost of annual maintenance.

**No Transition Needed**  
5 mm LVT can be installed next to most carpet tiles without the need for transition strips. 2.5 mm LVT pairs well with StrataWorx® carpet tile with no transitions.

**Performs with Static and Rolling Loads**  
When direct glued the high PSI tolerance of the product enhances resistance to indentation.

**LEEDv4 Contributions**  
IEQ – Floorscore IAQ Certification  
MR – RFCI Industry Average EPD

Product Details

**Pattern Repeat**  
The tile size is not divisible into pattern repeat length resulting in a wide variety of unique tiles after the cutting process.

**Installation Methods**  
Ashlar, Brick, Stagger, and Herringbone.

Recommended Applications		Light	Moderate	Heavy
Ideal for Heavy Commercial Environments Education   Healthcare  Hospitality   Retail   Workplace	Foot Traffic	<div></div>		
	Rolling Loads	<div></div>		
	Static Loads	<div></div>		