

## Skyscraper: Buildings SGT601 / Lights SGT602

Construction Tufted Textured Loop Tile Size 250 x 1000mm

FITTON Premium Nylon Yarn Type

Stain/ Soil Resistant Resistec

Dye Method 100% Solution Dyed

550gm/m<sup>2</sup> (16oz/yd<sup>2</sup>) [±5%] **Tufted Face Weight** 

Gauge 1/12 Stitches per inch 10 120

Finished Pile Height 4.2mm (0.17") [±5%] 2.79mm (0.11") [±5%] **Finished Pile Thickness** 

**Average Density** 5236oz/yd<sup>3</sup>

Secondary Backing Sus-Pac Thermoplastic 7mm (0.276") [±5%] **Total Thickness** 

**Total Weight** 2,930gm/m<sup>2</sup> (86.17oz/yd<sup>2</sup>) [±5%]

## **Performance Specifications**

Tuft Bind ASTM D1335 > 8lbs

ASTM D5252 > 3.0 at 12,000 cycles **Hexapod Test** 

Flammability (Radiant Panel Test) ASTM E648 ≥ 0.45 (Class I)

**Smoke Density** ASTM E662 ≤ 450 ASTM D6540 Soiling Stain Resistance AATCC 175

**Dimensional Stability** ASTM D7570 < 0.2%

**Methenamine Pill Test** ASTM D2859 (Self-Extinguishing) Colorfastness to Light (AATCC 16E) ≥ 4.0 at 80 Hours Colorfastness to Crocking (AATCC 165) ≥ 4.0 Wet or Dry **Electrostatic Propensity** (AATCC 134) 20% R.H.,70° F. ≤ 3.5 KV (TARR) Commercial End-Use Applications **Texture Appearance Retention Rating** 


**Indoor Air Quality** CRI Green Label Plus™

## **Recommended Installation Method**



Monolithic











Stagger

THE CARRETAND RUGINSTITUTE. Declare. THUB (E

















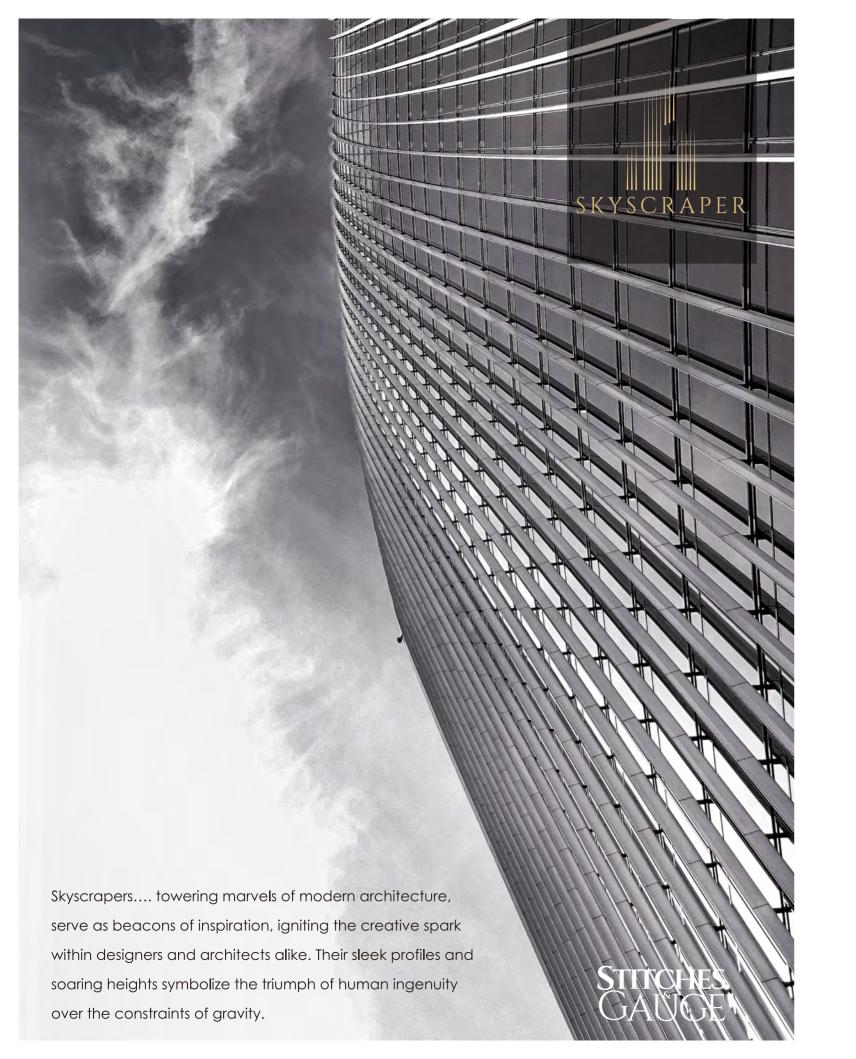

Buildings **SGT601** 

Lights **SGT602** 

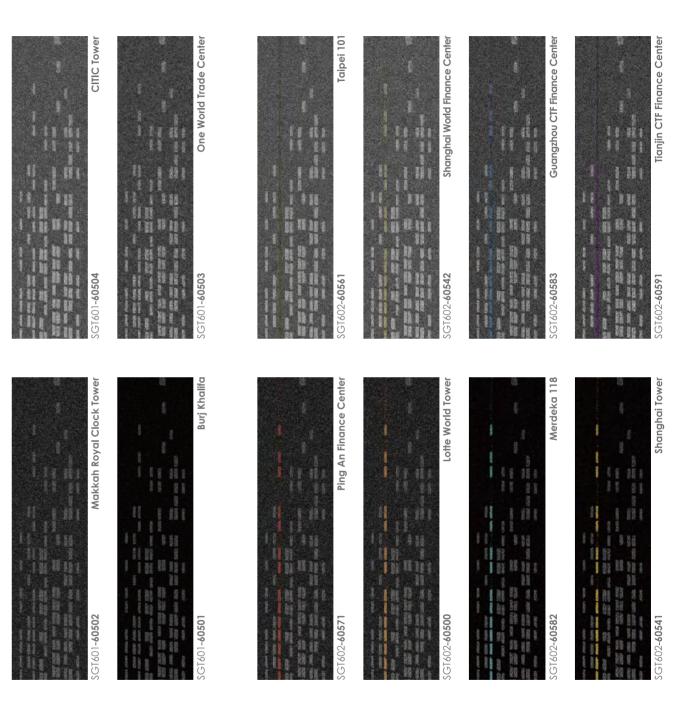

Names of 12 tallest completed buildings in the world Jan 2024, were extracted from Council of Tall buildings and Urban Habitat CTBUH.



