



Respite

ShawContract®



Take a quiet moment to recharge. Respite creates warmth and a calming space to unwind.

The innovative COREtec XRC technology delivers high performance and durability in heavy commercial environments. The patented construction is dimensionally stable, waterproof, and scratch resistant.

Respite's attached cork underlayment reduces sound transmission, delivering a human centered solution for public and private spaces. Designed with locking edges, installation is quick and easy, reducing time and labor cost.

Respite is designed with human impact in mind, free of ortho-phthalates and is FloorScore and Greenguard Gold certified, assuring healthy indoor air quality and low VOC emissions.



Color and Visual Variation

Color and visual variation is inherent in all modular resilient products. It can vary slightly or significantly from piece to piece within a color. V1 has little or no variation from piece to piece. V4 will have a large variation in color and visual.

V1
uniform appearance

V2
slight variation

V3
moderate variation

V4
substantial variation

Images represent shade variation only.
Samples should be used for color

Respite 4090V | Installed Stagger

V2

alabaster 90515

V2

ashen 90516

V2

cabin 90506

V2

pat 90250

V4

lodge 90720

V3

trail 90760

V2

cane -90740

V2

track 90710


V3

redwood 90840

V4

glen 90750

Respite

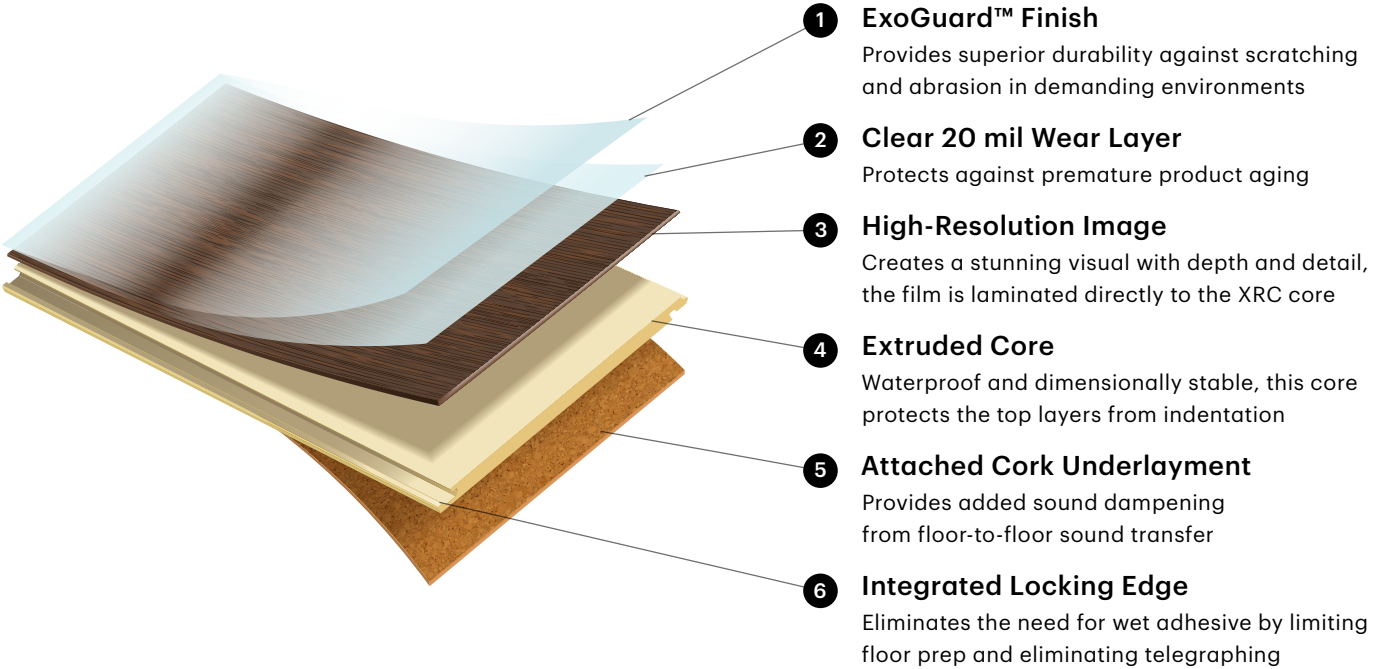

Waterproof
COREtec® XRC is 100% waterproof and can be installed in areas with topical moisture such as lobbies, reception areas, kitchens and bathrooms.

Scratch Resistant
ExoGuard™ finish combined with low gloss and proper embossing provides excellent stain, scratching and abrasion resistance.

Reduces Sound Transmission
COREtec XRC features an attached cork underlayment that provides added sound dampening from floor-to-floor sound transfer.

Faster Installation
Installs 12× faster than comparable products. Installs right out of the box with no product acclimation time with little or no floor prep required.

Reduces Cost
Floating installation allows installation over existing hard surfaces with little or no floor prep. It will not telegraph and will hide many sub-floor imperfections.

No Expansion Joints Required*
Superior dimensional stability with less expansion and contraction than standard LVT.

Product Details			
Pattern Repeat**	Installation Methods	Recommended Adhesives	Coordinating Accessories
Repeat Width 38.74 in 98.40 cm	Ashlar, Brick and Stagger	Shaw 4100, Shaw 200 or Shaw 4151	Quarter Round, T-mold, Baby Threshold, Reducer, Overlap Stair Nose and Flush Stair Nose
Repeat Length 62.20 in 158.00 cm			


Recommended Applications

Ideal for Heavy Commercial Environments:
Education | Healthcare | Workplace | Retail
Multi-family | Senior living | Hospitality



* An expansion joint is an intentionally plaed gap in a flooring installation covered by a t-mold transition strip that allows for the expansion and contraction of a product within a room to accommodate temperature fluctuations and movements within the building's structure. Expansion gaps at walls are still required.

** Tile size is not divisible into pattern repeat length resulting in a wide variety of unique tiles after the cutting process.

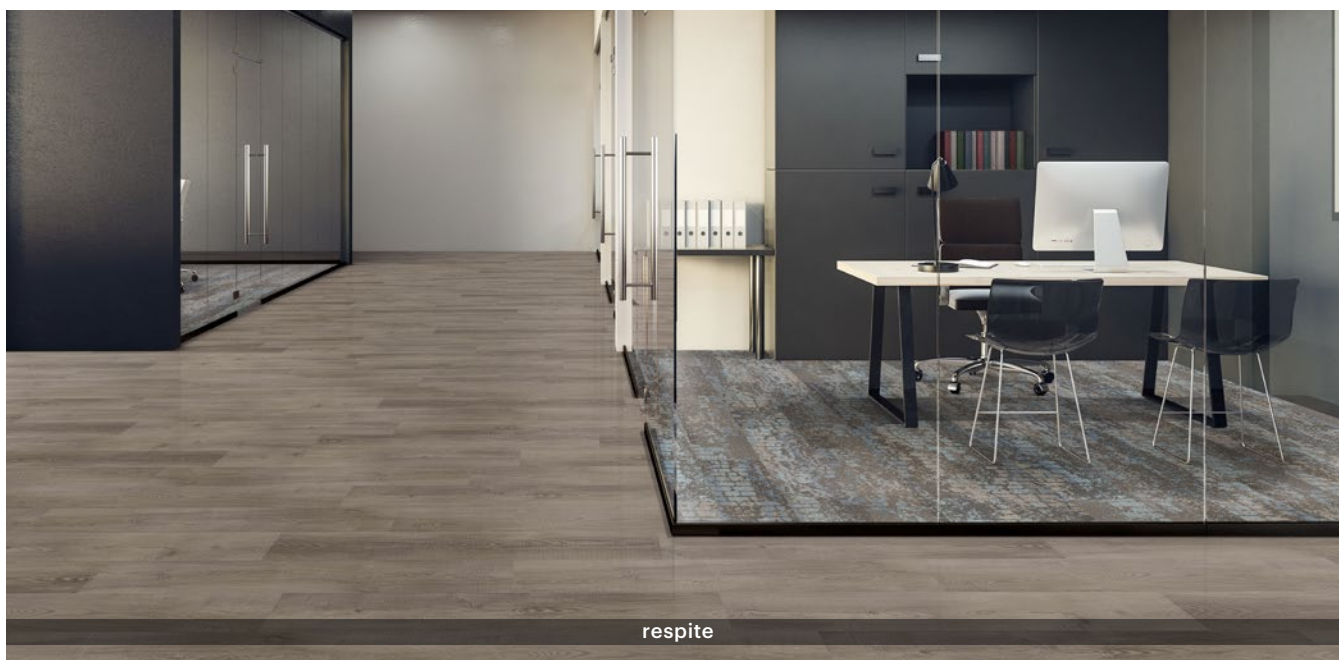

Respite

Specifications

Style Name	Respite
Style Number	4090V
Construction	Multi-layer SPC
Attached Underlayment	Cork
Finish	ExoGuard™
Class / ASTM F3261	Class III, Type B
Installation	Floating, Direct Glue
Recommended Adhesive	Shaw 4100 or 4151


	US Units	Metric Units
Nominal Dimensions	7 in × 48 in	18 cm × 122 cm
Wear Layer Thickness	0.020 in	20 mil (0.5 mm)
Overall Thickness	0.197 in	5.0 mm
Actual Width	7.2 in	18.29 cm
Actual Length	48.03 in	121.9 cm

Residual Indentation	(ASTM F1914) Passes
Resistance to Heat	(ASTM F1514) Passes
Resistance to Light	(ASTM F1515) Passes
Resistance to Chemicals	(ASTM F925) Passes
Radiant Panel	(ASTM E662) < 450
NBS Smoke	(ASTM E662) < 450

Warranty*	15 Year Commercial Limited
------------------	----------------------------


*For detailed warranty information visit shawcontract.com.

Recommended Installation Methods



Folder Re-order 4090V-V46

Color and Visual Variation Index



- V1 Uniform Appearance**
- V2 Slight Variation**
- V3 Moderate Variation**
- V4 Substantial Variation**

Color and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colors.

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | **Atlanta** +1 404 853 7429 | **Bengaluru** +91 80 6773 0202 | **Beijing** +86 10 6568 588 | **Chicago** +1 312 467 1331 | **Dubai** +971 4 313 2496 | **Hong Kong** +852 2623 0371 | **Latin America (Miami)** +1 305 827 5912 | **London** +44 207 961 4120 | **Los Angeles** +1 800 233 1614 | **Melbourne** +61 3 9939 8543 | **Mexico City** +55 5010 7600 | **Mumbai** +91 22 6284 5050 | **Nantong** +86 400 800 7429 | **New York** +1 212 953 7429 | **Paris** +33 1 55 27 39 07 | **San Francisco** +1 415 955 1920 | **Santiago** +562 2431 5000 x 550 | **São Paulo** +55 11 3071 1702 | **Shanghai** +86 21 3338 4000 | **Singapore** +65 6733 1811 | **Sydney** +1 800 556 302

This product is manufactured and sold for floorcovering use only. To meet warranty requirements, approved adhesives must be used for glue-down application as outlined in the Shaw Contract installation instructions. Installation and maintenance instructions can be found on shawcontract.com. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Not for use in commercial wet areas due to slip and fall concerns.

shawcontract.com | +1 800 257 7429 | © 2019 Shaw Industries Group, Inc., a Berkshire Hathaway Company

ShawContract®